


LA-BO

The gentle blow-on applicator

051790

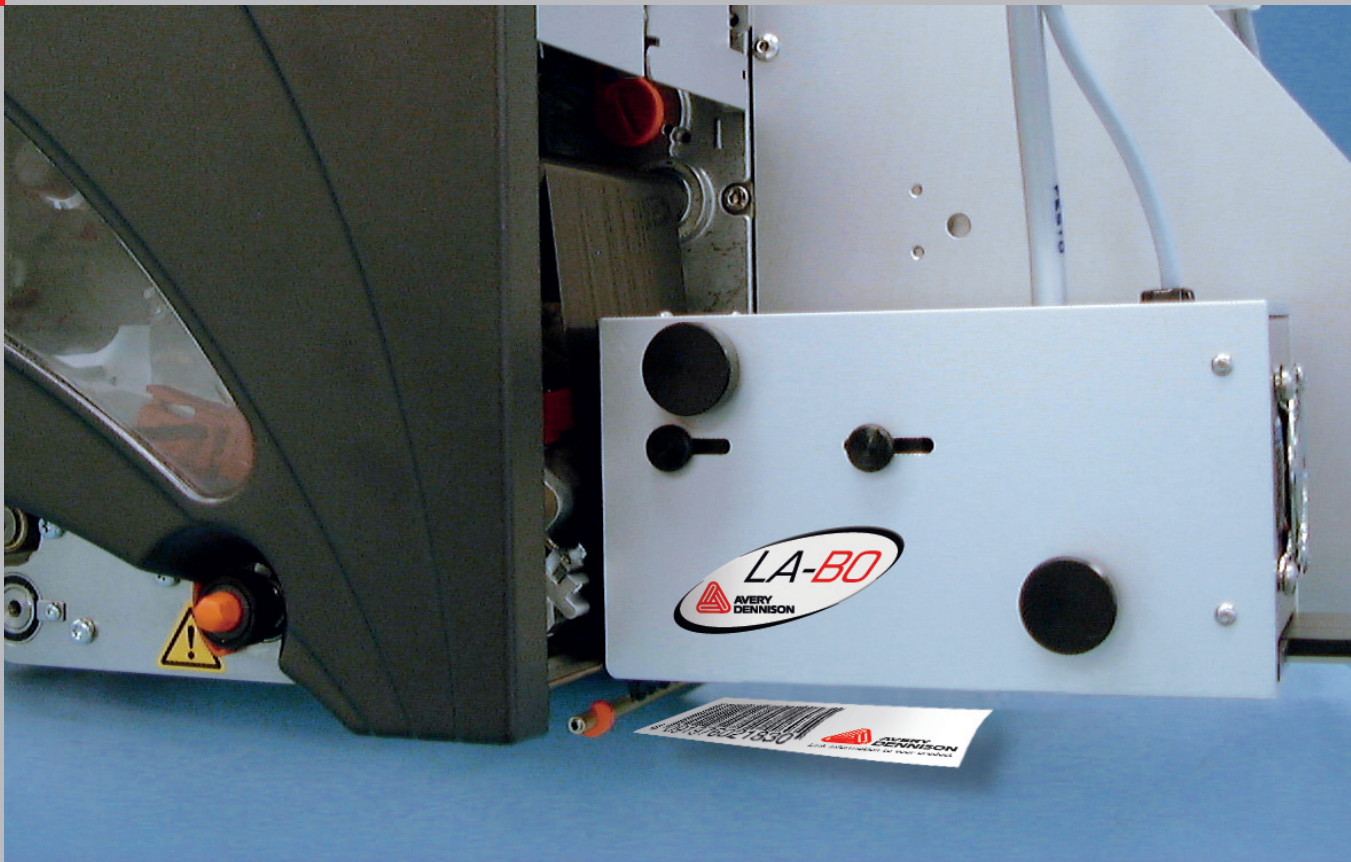

The benefits of the new Label Applicator **Blow-on:**

- ✓ Non-contact labelling of sensitive products
- ✓ Pivoting applicator allows comfortable material change
- ✓ Sliding bars enable fast and easy setting of label size
- ✓ Easy attachment with model-specific mounting plates
- ✓ Minimal wear parts mean minimal maintenance

Designed for ALS 20x and ALX 92x-Series

The Applicator LA-BO at a Glance

Material specifications

Type of labelstock:	Self-adhesive label
Label material:	Paper and synthetic material up to 240 g/m ²
Label width:	30 - 100 mm*
Label length:	30 - 100 mm*

* Different label sizes can be accommodated by use of easy adjustable sliding bars.

Labelling function

Label position:	Top, bottom or side of product		
Compatible for:	ALS 204, ALS 206 ALX 92x	All labellers require Applicator Interface Basic; available for right- and lefthand models	
Capacity:	ALS 20x	50 x 50 mm:	up to 160 labels/min
		100 x 100 mm:	up to 100 labels/min
	ALX 92x	Real 1:1 mode:	up to 80 labels/min
		Batch Mode:	up to 120 labels/min
Based on label size of 80 x 80 mm, print speed 10"/s			
Max. blow distance:	50 x 50 mm label:	100 mm	
	100 x 100 mm label:	50 mm	
Placement Accuracy:	max. +/- 1 mm		
	The best positioning results are obtained with label sizes from 40 x 40 mm to 80 x 80 mm; round labels from 40 to 70 mm.		

Sizes

(incl. mounting plate)


W x H x D:	ALS	357 x 188 x 153 mm
	ALX	300 x 345 x 153 mm
Weight:	3,5 kg	

Connections

Power supply:	24 V
Air consumption:	1 litre per blow-cycle
Air supply:	5 bar, dry and clean

Environmental Data

Operating temperature:	5° - 40° C
Humidity:	30 - 80 % (non-condensing)
Noise level:	82 dB during blow-cycle
Protection class:	41
Standards:	CE certified



You're never far from an
Avery Dennison representative:

Benelux
Denmark / Scandinavia
France

Italy
Turkey

USA
PR China / Hong Kong

Distributor



**AVERY
DENNISON**
Link information to your product